Product Catalogue

2020 60 x 60 cm | 60 x 120 cm Digital Glazed Verified Tiles











Exporters & Importers of Digital Glazed Wall & Floor Tiles

ISO 9001:2008 CERTIFIED COMAPNY



ABOUT

Established in the year 2011, we, "Wetzone Enterprises" are an eminent firm engaged in manufacturing, supplying and exporting an exclusive range of Vitrified Tiles. Our tiles are manufactured by using superior grade raw material and employing proven techniques. These tiles are extensively used in residential and commercial establishments like Hospitals, Schools, Restaurants, Domestic Apartments andvarious other places. Our tiles are highly acclaimed in the market for smooth surface, appealing designs, easy to clean feature and durability.

VISION

To become the most successful tiles manufacture Company in the World at delivering the best customer satisfaction in markets we supply

- -Create something that connects with both company and clients.
- -Make it about the Clients

MISSION

Our Roadmap starts with our mission, which is enduring. It declares our purpose as a company and serves as the standard against which we weigh our actions and decisions.

- -To Create Value and make a Difference...
- -To give our customer a valuable, affordable and continence products...
- -To bright up our customer houses and projects...










Feel the new beauty Everyday With Us.....

Digital Glazed Vitrified Tiles | 600 x 600mm Digital Glazed Vitrified Tiles | 600 x 1200mm

INDEX


600x600mm.....30

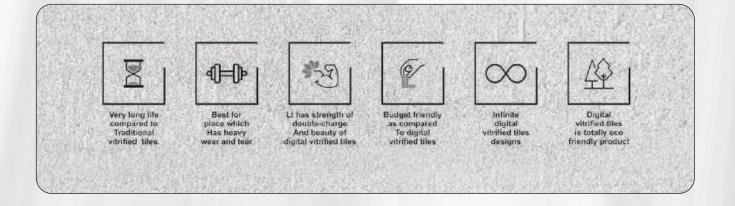







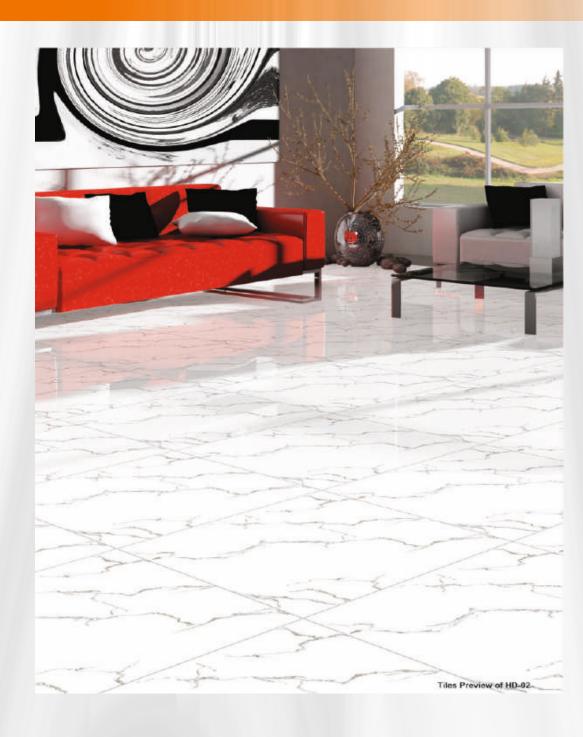



More Whitnes





Better Surface




High Strength









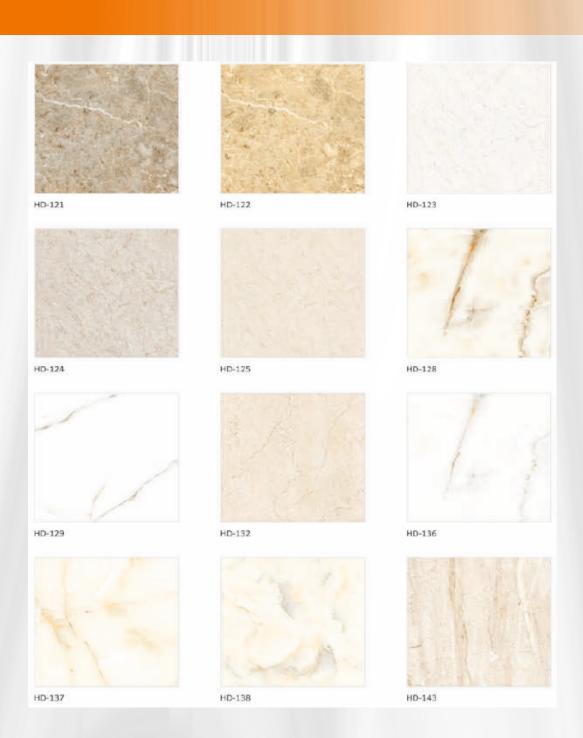










High Strength







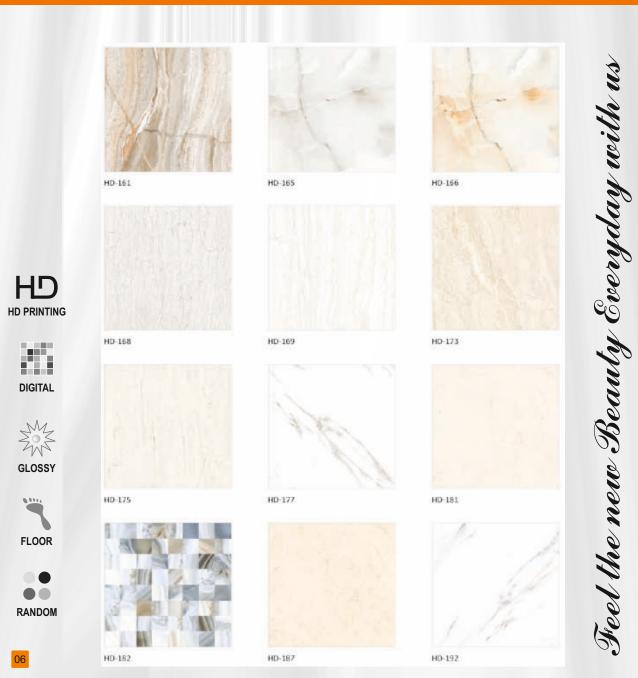





More Whitnes



Better Surface



High Strength







More Whitnes


Surface

Stain

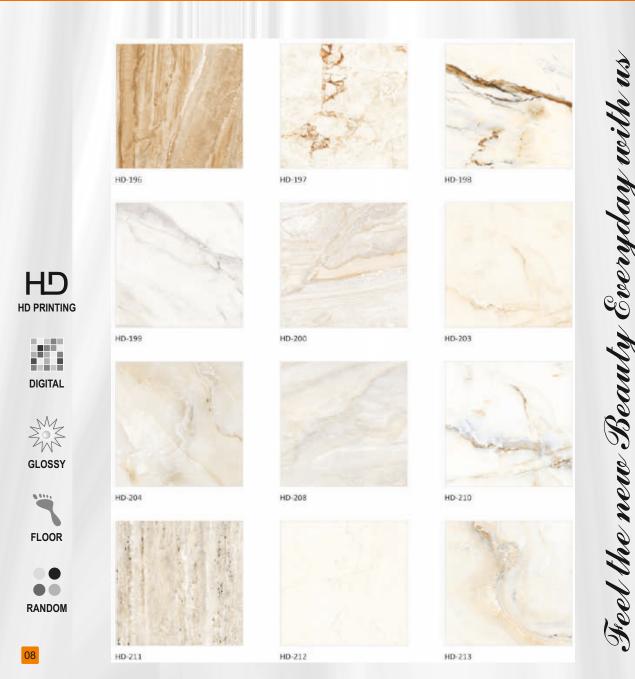

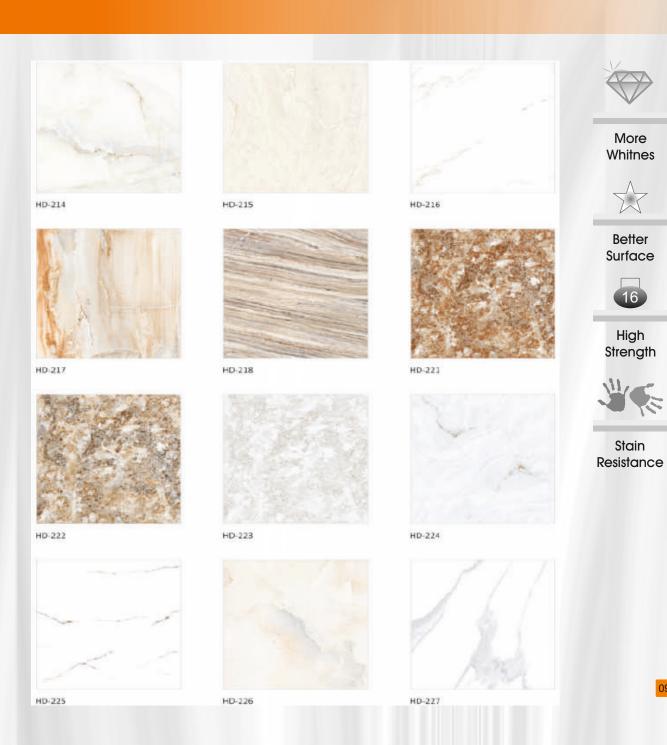



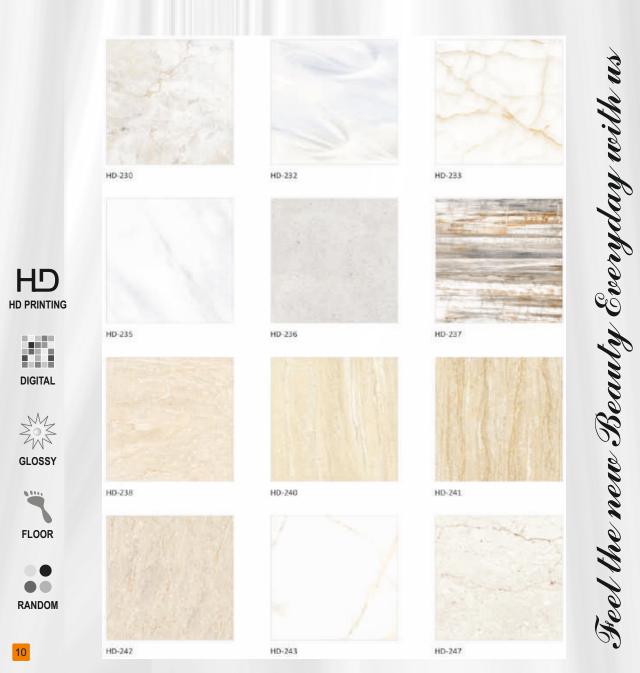





More Whitnes











Stain Resistance

11

DIGITAL

GLOSSY

FLOOR

RANDOM









More Whitnes



Better Surface



High Strength



Resistance


DIGITAL

GLOSSY

FLOOR





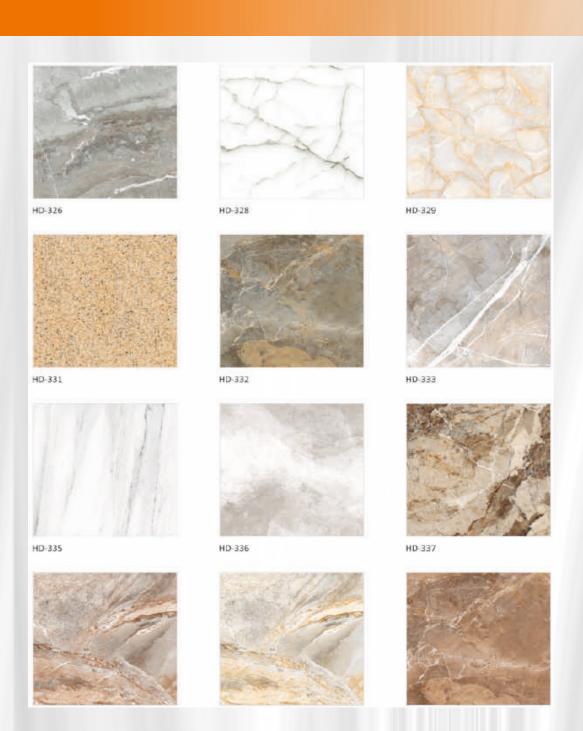



More Whitnes



Surface



High Strength





CH


HD PRINTING

DIGITAL

FLOOR

RANDOM



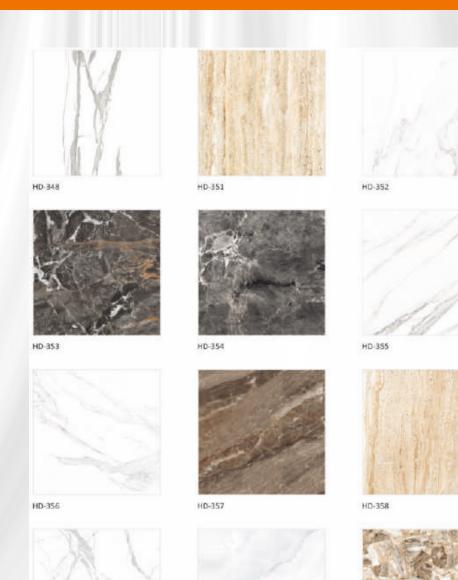

Feel the new Beauty Everyday with us





More Whitnes



Better Surface



High Strength





HD

HD PRINTING


DIGITAL

GLOSSY

FLOOR

RANDOM



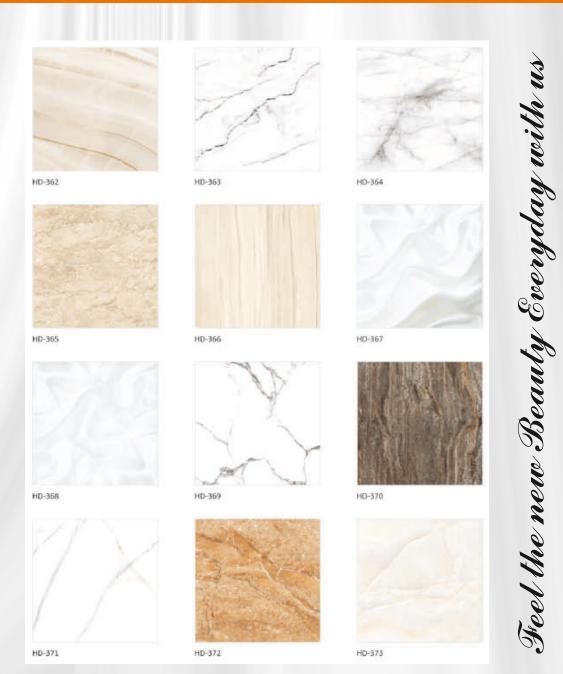





More Whitnes



Better Surface



High Strength



600x600 mm. DIGITAL VITRIFIED TILES RUSTIC FINISH







HD-387


















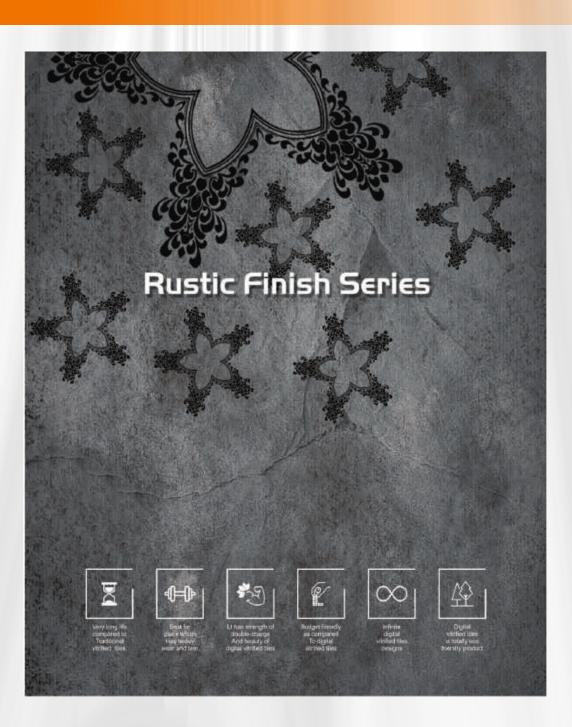



More Whitnes



Better Surface



High Strength



Resistance



FLOOR















More Whitnes



Better Surface









Stain Resistance













HD-5015































More Whitnes



Better Surface



High Strength







Stain Resistance







Feel the new Beauty Everyday with us





HD-5060









RANDOM

HD

HD PRINTING

DIGITAL

•••







HD-5059



















Better Surface























HD-5072

HD-5066



HD-5067

Feel the new Beauty Everyday with us































Better Surface



High Strength

















HD-5086





HD-5094



HD-5085

Feel the new Beauty Everyday with us

















HD-5108





600 x 600 mm. DIGITAL VITRIFIED TILES LAPATO SERIES


















Feel the new Beauty Everyday with us

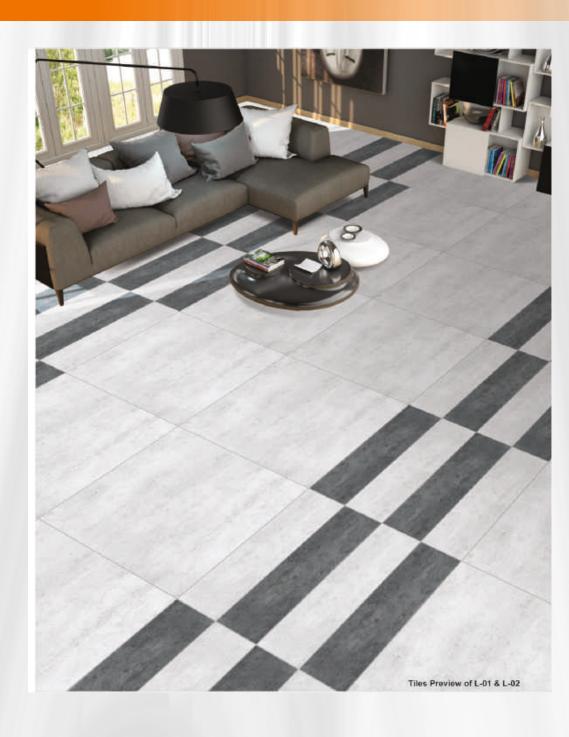



More Whitnes



Better Surface



High Strength





600 x 1200 mm. DIGITAL GLAZED POLISHED VITRIFIED TILES



HD


DIGITAL

GLOSSY

FLOOR

RANDOM



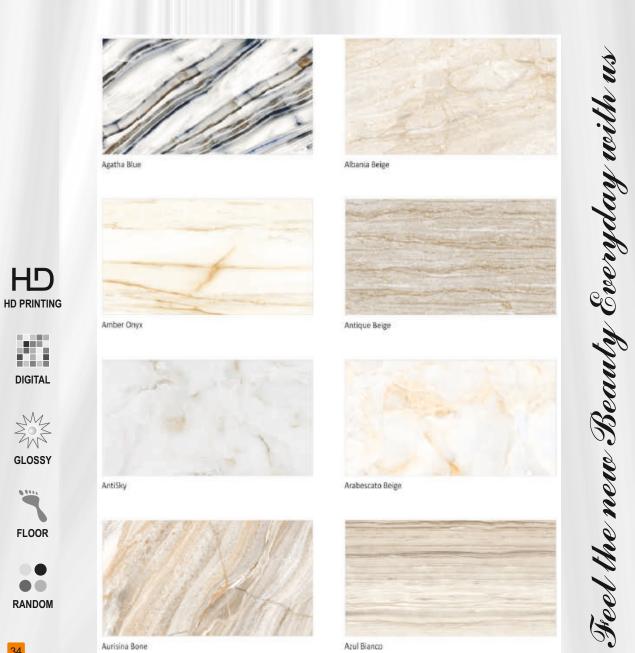









High Strength



Stain Resistance



Tiles Preview of Albania Beige

HD


HD PRINTING

DIGITAL


GLOSSY

FLOOR



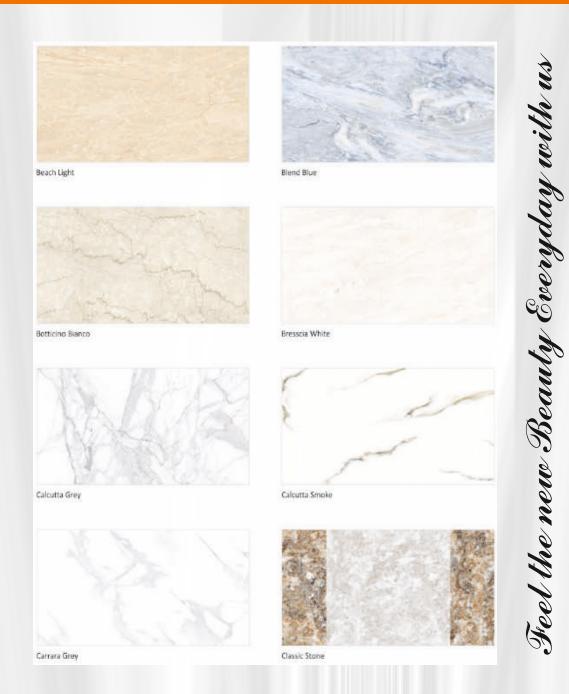



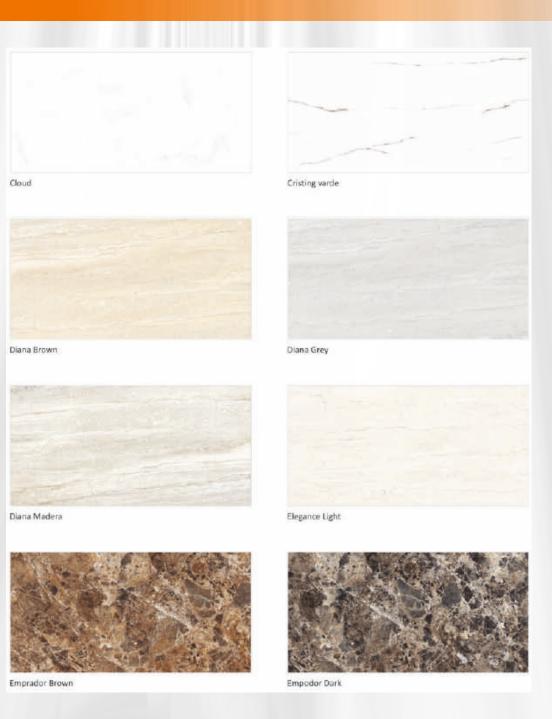



More Whitnes



Better Surface




High Strength















Feel the new Beauty Everyday with us







More Whitnes



Better Surface



High Strength



Stain Resistance



HD



DIGITAL

GLOSSY












Tiles Preview of Graco Grey












Feel the new Beauty Everyday with us

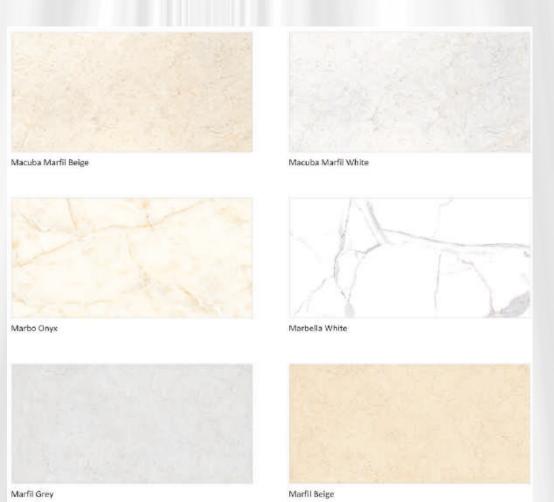


















Laurent Onyx Beige







More Whitnes



Better Surface




High Strength



Stain Resistance













More Whitnes



Better Surface



High Strength



Stain Resistance



Pietra Light







GLOSSY











Pietra Dark

Feel the new Beauty Everyday with us






DIGITAL


GLOSSY

FLOOR



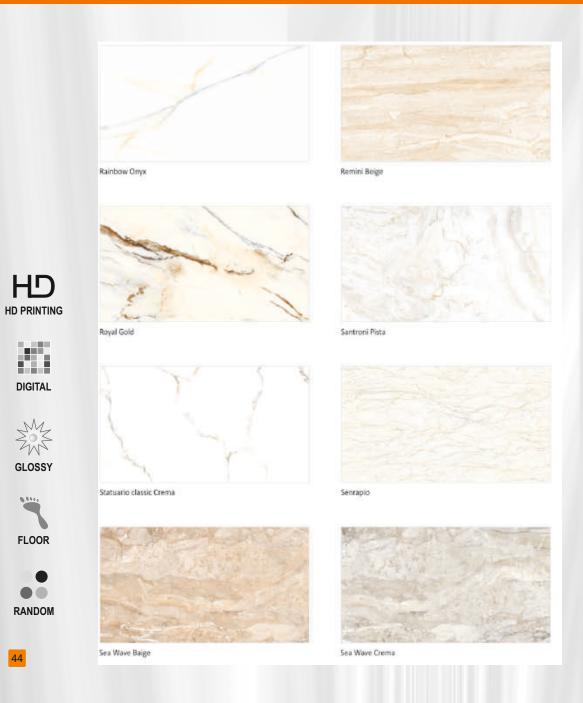

Feel the new Beauty Everyday with us

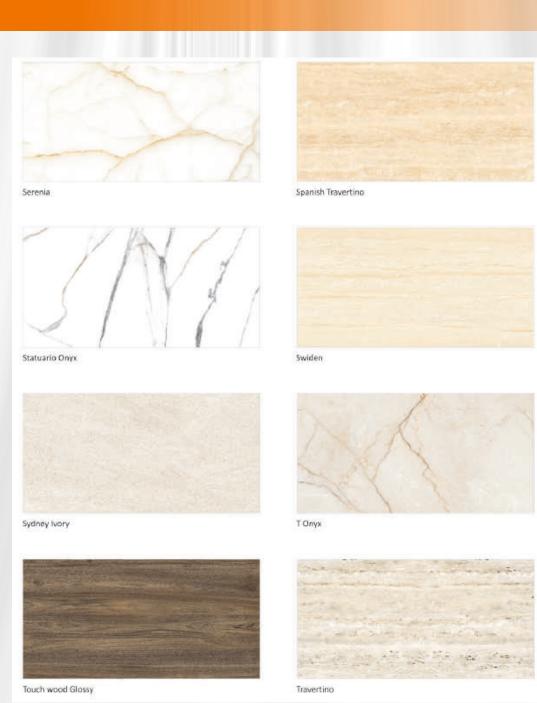













Feel the new Beauty Everyday with us





More Whitnes



Better Surface



High Strength



Stain Resistance







GLOSSY











Traveze Brown




Tiles Preview of Tuscany White & Tuscany Black

DIGITAL


GLOSSY

FLOOR



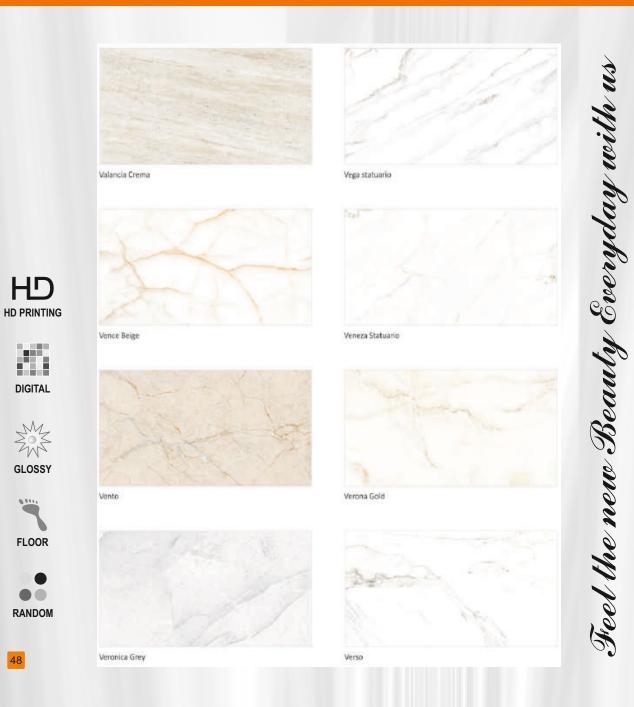



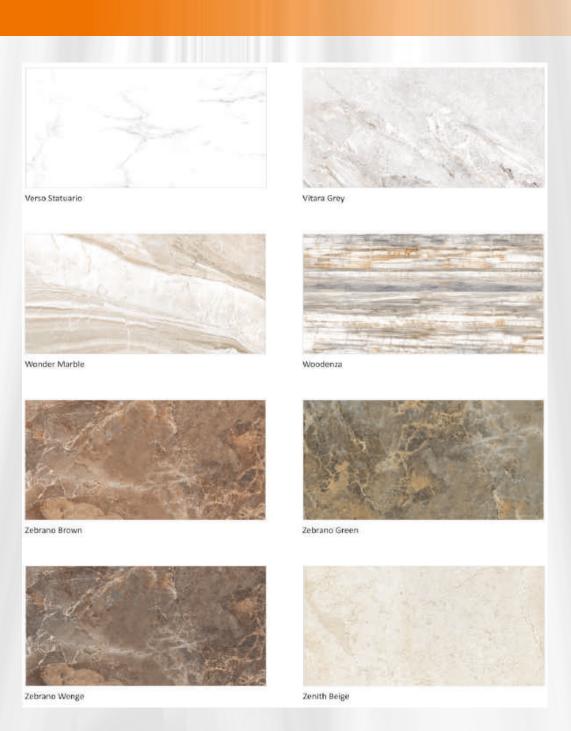



More Whitnes



Better Surface



High Strength









DIGITAL

FLOOR



Feel the new Beauty Everyday with us











Bark Tortura Grey









Fossile Beige











More Whitnes



Better Surface



High Strength





Resistance



HD


DIGITAL

RUSTIC

FLOOR





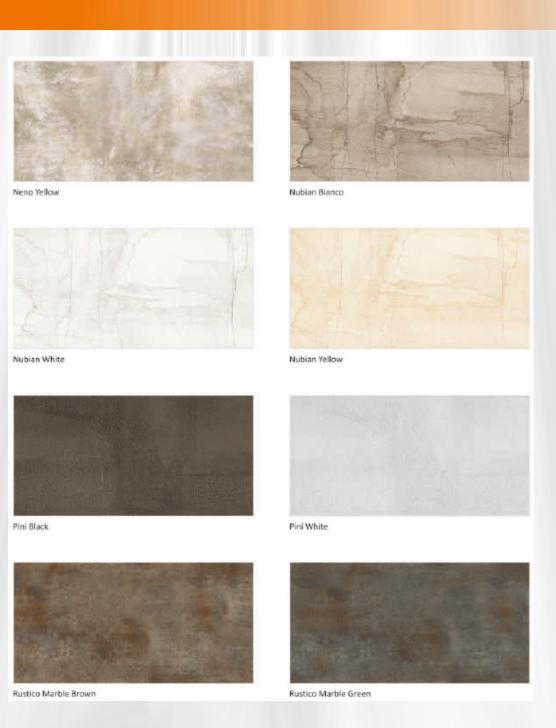



More Whitnes



Better Surface



High Strength



Stain Resistance



HD

DIGITAL

RUSTIC

FLOOR











More Whitnes



Better Surface




High Strength








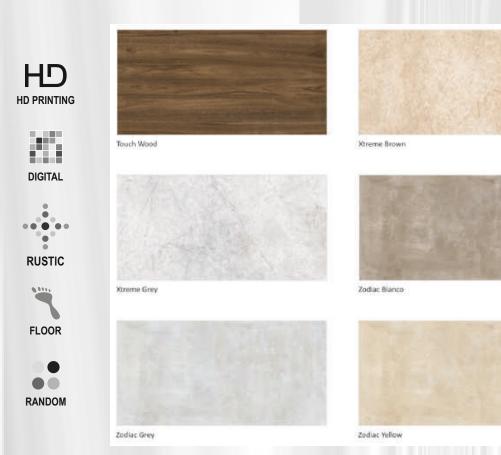


Feel the new Beauty Everyday with us

Tiles Installation Guide

Vitrified tiles are manufactured using latest Technology machinery are with best quality sands, which are purified by removing all impurities, so use proper & perfect way of installations to avoid bending, shade variation and sizing problems.





- > Place all the arrows in same direction
- > Maintain perfect level at point (1) an (2) as shown in the picture
- > Bending up to 0.5mm is valid in ceramic industry as mentioned in catalogue. (zero Bending is not possible)

Quality Standard Reference Table



No.	PROPERTY	International Std ISO13003/EN 176 Group Bla	ZED VITRIFIED Value	Method of Testing
01	Deviation in Length	±0.6%	±0.3%	EN 98
02	Deviation in Thickness (mm)	± 5%	± 3%	EN 98
03	Straightness of Sides	±0.5%	±0.3%	EN 98
04	Rectangularity	±0.6%	±0.4%	EN 98
05	Surface Flatness	±0.5%	±0.4%	EN 98
06	Water Absorption	>0.05%	>0.05%	EN 99
07	Moh's Hardness	>6	>7	EN 101
80	Flexural Strength	> 27N/mm²	> 40 N/mm²	EN 100
09	Abrasion Resistance	> 204 N/MM³	> 190 N/MM³	EN 102
10	Skid Resistance (Friction Coefficient)	>0.4	>0.5	ASTM C -1028
11	Breaking Strength	> 1113N	> 2600N	ASTM C -648
12	Density (gm/cc)	>2	> 2.3	DIN 51082
13	Frost Resistance	Frost Proof	Frost Proof	EN 202
14	Chemical Resistance	No Damage	No Damage	EN 106
15	Thermal Shock Resistance	No Damage	No Damage	EN 104
16	Colour Resistance	No Damage	No Damage	EN 51094
17	Thermal Expansion	< 9x10*	< 7x10 ⁻⁶	EN 103
18	Stain Resistance	Resistant	Resistant	ISO 10545-14
19	Moisture Expansion	Nii	Nil	ISO 10545-10
20	Glossiness	(4)	Min. 90%	Gloss Meter

Note -

Colours shown are as accurate as the limitations of the printing process will allow. Prospective customers are advised to inspect a sample of the tile before ordering. Every effort has been made to ensure the accuracy of the information given. However, the company reserves the right to change the specifications without prior notice. Sometimes variations in shade or size being inherent to ceramic industry may occur. Before fixing, we advice you to follow the fixing instruction on the cartons of the tiles as no responsibility can be accepted by the company once the tiles have been fixed.

APPLICATIONS

















DISCLAIMER: We reserves the right to delete & amend either totally of partially, and of the colours, shapes, size, references and other technical specification contain in catalogue at any time, the colours shown of tiles in this catalogue are purely illustrative and limited to printing process. Please refer actual sample final selection. The details of colours, size, references should be vitrified for Typographical errors. SHADE & SIZE VARIATIONS are inherent characteristics of ceramics. NO COMPLIANT SHALL BE SHALL ENTERTAINED ON TILES ALREADY LAID/FIXED.

PACKING DETAILS

Nominal Size	Nominal Thickness (Approx)	Per Box Pcs	Area / Box	Weight (Approx)
600x600mm.	10.5mm.	4 pcs	1.44 Sq.Mt.	31.0 Kgs
600x1200mm.	12mm.	2 pcs	1.44 Sq.Mt.	40.0 Kgs



Quality Standard Reference Table

Image



Director : Imran Ashraf **Director : Danish Amin**

+91 98203 10005

+91 98670 54786

wetzone_bathrooms
wetzone

wetzone@gmail.com www.wetzone.in

301/309, Reay Chambers, Opp. Dockyard Road Station, Near Rosary High School, Dockyard, Mumbai 400 010







